



The image above shows an AluLite Horizontal Flat model but these instructions are also suitable for various other models using the same bracket set.

Ancillary Components	
2	Blank Plug
1	Air Vent Plug
4	Wall Plug (a)
4	Bracket Base (b)
4	Washer (c)
4	Wall Screw (d)
4	Bracket Stem (e)
4	Mini Screw (f)
1	Towel Hanger (g)
4	Screw (h)

PLEASE READ THESE INSTRUCTIONS THOROUGHLY BEFORE COMMENCING INSTALLATION.

PLEASE CHECK THAT ALL ANCILLARY COMPONENTS ARE PRESENT AND THAT THE PRODUCT HAS NOT SUFFERED ANY DAMAGE DURING TRANSIT.

This product must be installed by a fully competent person and in accordance with current IEE Wiring Regulations. It may be necessary to notify your local authority building control department or to have the work carried out by a suitably qualified electrician. The power supply to the towel rail must be protected by a 30mA differential circuit breaker.

Switch off the electrical supply at the mains during installation. When drilling or fixing into walls, floors or ceilings it is essential that you check for pipes & wires before commencing. Please ensure that you wear all necessary personal protective equipment.



The towel rail must be installed in the correct orientation with the electrical element at the bottom.

The surface may get very hot so it is not suitable for use in locations where this could be a hazard. In order to avoid a hazard for very young children this appliance should be installed at least 600mm above floor level. This towel rail can be used by children aged 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children should not be allowed to play with this towel rail.

Due to our commitment to continuous product development we reserve the right to alter specifications without notice.

Regular cleaning with a soft cloth will keep the surface of your product looking new. Soapy water can be used to remove stubborn marks. Do not use abrasive or chemical cleaners as these will damage the surface finish over time.

This product carries a 1 year warranty against manufacturing defects. Our liability under any warranty expressed or implied is strictly limited to replacement of defective goods and no consequential losses of any kind will be entertained. Proof of purchase will be required for all warranty claims.



At the end of the product's life, this symbol applied to the product, indicates the obligation to consign it to an appropriate recycling centre to be disposed of in accordance with the European Directive WEEE guideline.


 EN-60335-1 & EN60335-2-43
 Low Voltage Directive 2006/95/EC
 EMC Directive 2004/108 EC
 RoHS Directive 2011/65/EU

Electrical Connection Type - Hard Wired
 Voltage - AC 240V - 50Hz
 Electrical Insulation - Class 1
 Ingress Protection Rating IPX5


Kudox Limited - 1 Bray Place - London - SW3 3LL
 Technical Support e-mail - support@kudox.com
 Technical Support Telephone - 020 72255020
 FAQ & Advice - www.kudox.com

Bathroom Zones

This appliance is IPX5 rated for installation in IEE Bathroom Zones 1 & 2 along with the all areas outside the zones.


This appliance is not suitable for installation in Zone 0. It is the responsibility of the installer to assess the actual installation environment to establish suitability in the specific location. Despite an IP rating that allows installation in Zone 1, we recommend careful consideration of suitability of the installation environment before installing in Zone 1.

We do not recommend installation inside a shower enclosure but over-bath installation may be suitable in certain situations.

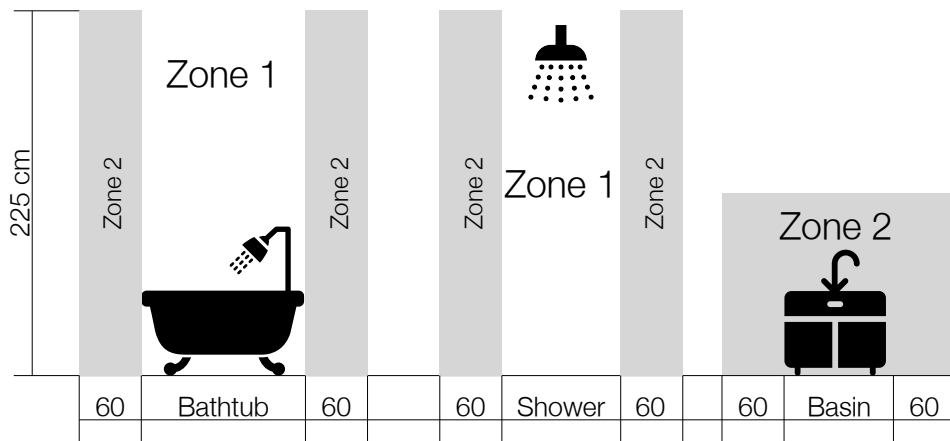


Fixing The Towel Rail


1. Check that the wall is strong enough to hold the weight of the towel rail filled with water. On plasterboard walls we strongly recommend fixing to the timbers. Mark your preferred bracket positions on the wall and drill holes for the fixings you intend to use. The Wall Plugs supplied are only suitable for solid walls and you will need alternative fixings for other wall types.
2. Screw the Bracket Bases to the wall using the Washers & Wall Screws provided or alternative fixings. The small holes for the Mini Screws should be facing downward.
3. Screw the Bracket Stems into the threads on the back of the towel rail.
4. Align the Bracket Stems with the Bracket Bases and push the towel rail back into position.
5. Hold the towel rail back against the wall and insert the Mini Screws into the bottom of the Wall Supports and tighten firmly with a screwdriver.

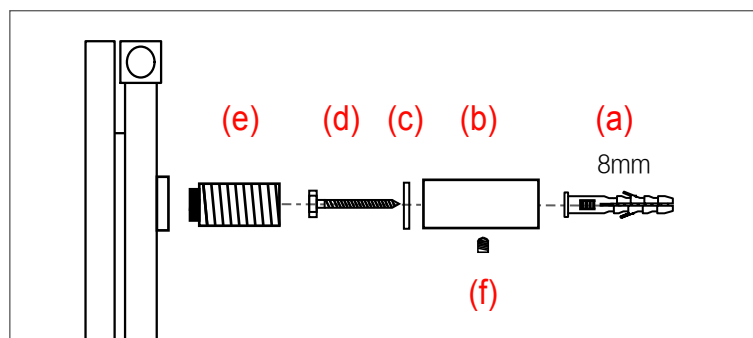

Fitting The Towel Hanger

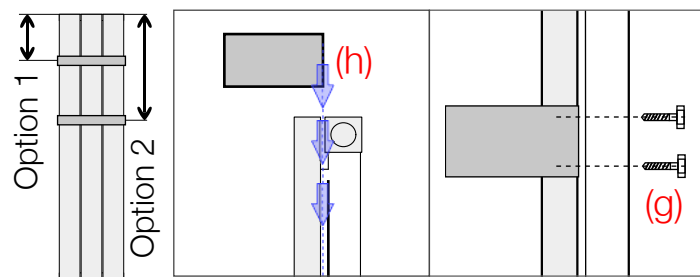

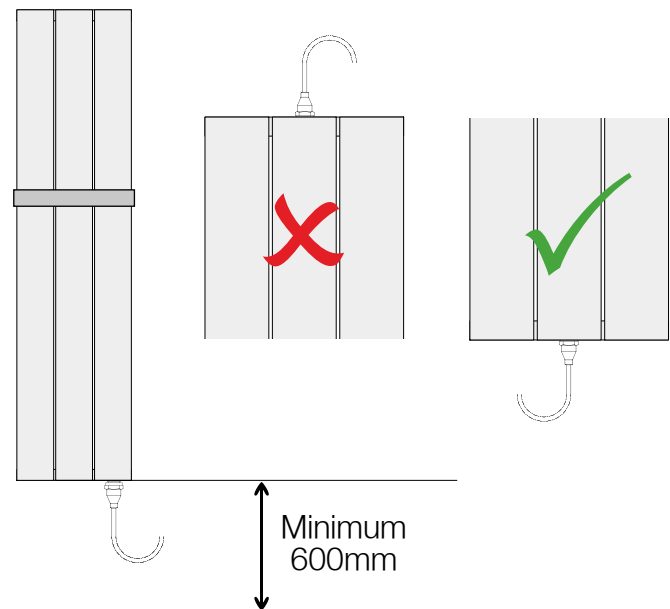


Orientation & Installation Height



Electrical Connection

6. Cut the cable to the desired length and strip the outer sleeve for approximately 40mm. Cut the coloured wires to the correct lengths and strip off approximately 5mm of the insulation on each one.

7. Connect the wires to a fused connection unit fitted with a 3A fuse and tighten the cord clamp.

Brown = Live 
 Blue = Neutral 
 Green/Yellow = Earth! 

8. Place the fused connection unit onto the back box and tighten the two holding screws.